



DESCRIPTION

The PBSS4350Z is available in SOT-223 package.


FEATURE

- Low collector-emitter saturation voltage
- High collector current capability: IC and ICM
- High collector current gain (hFE) at high IC
- Higher efficiency leading to less heat generation

ORDERING INFORMATION

Package Type	Part Number
SOT-223	PBSS4350Z
Note - 7" Reel	SPQ: 1,000pcs/Reel
AiT provides all RoHS Compliant Products	

PIN DESCRIPTION

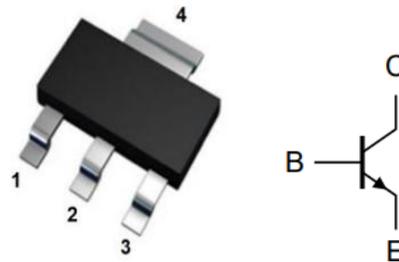

PIN#	DESCRIPTION
1	BASE
2	COLLECTOR
3	EMITTER
4	COLLECTOR

ABSOLUTE MAXIMUM RATINGS

T_A = 25°C, unless otherwise noted.

V _{CEO} , Collector–Emitter Voltage	40V
V _{CBO} , Collector–Base Voltage	50V
V _{EBO} , Emitter–Base Voltage	6V
I _C , Collector Current — Continuous	3A
P _C , Collector Power Dissipation	0.5W
R _{θJA} , Thermal Resistance, Junction–to–Ambient	250°C/W
R _{θJC} , Thermal Resistance, Junction to Case	35°C/W
T _J , Junction Temperature Range	-55°C~+150°C
T _{STG} , Storage Temperature Range	-55°C~+150°C

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

**ELECTRICAL CHARACTERISTICS**T_A = 25°C, unless otherwise noted.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Collector–Base Breakdown Voltage	V _{BR(CBO)}	I _C = 100μA, I _E = 0	50	-	-	V
Collector–Emitter Breakdown Voltage	V _{BR(CEO)}	I _C = 100mA, I _B = 0	40	-	-	V
Emitter–Base Breakdown Voltage	V _{BR(EBO)}	I _E = 100 μA, I _C = 0	6	-	-	V
Collector Cutoff Current	I _{CB0}	V _{CB} = 40V, I _E = 0	-	-	1	μA
Collector Cutoff Current	I _{CEO}	V _{CE} = 30V, I _B = 0	-	-	10	μA
Emitter Cutoff Current	I _{EBO}	V _{EB} = 6V, I _C = 0	-	-	1	μA
DC Current Gain	h _{FE}	I _C = 1A, V _{CE} = 2V	60	-	400	
		I _C = 100mA, V _{CE} = 2V	32	-	-	
Collector–Emitter Saturation Voltage	V _{CE(sat)}	I _C = 2A, I _B = 0.2A	-	-	0.5	V
Base–Emitter Saturation Voltage	V _{BE(sat)}	I _C = 2A, I _B = 0.2A	-	-	1.5	V
Current-Gain-Bandwidth Product	f _T	V _{CE} = 5.0V, I _C = 0.1A, f = 10MHz	50	-	-	MHz



ELECTRICAL CHARACTERISTICS CURVES

Fig 1. Static Characteristics

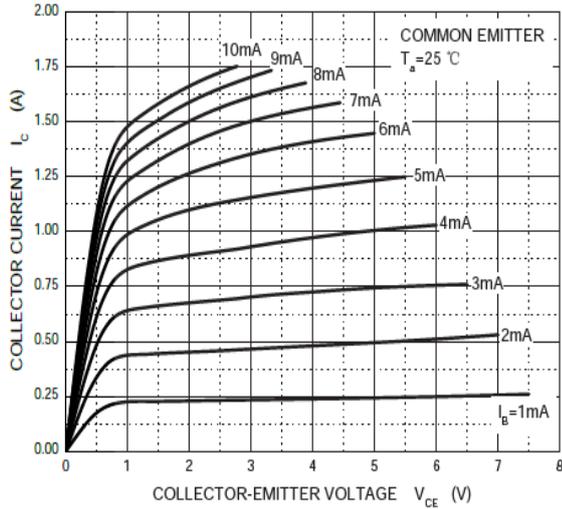


Fig 2. $h_{FE} - I_c$

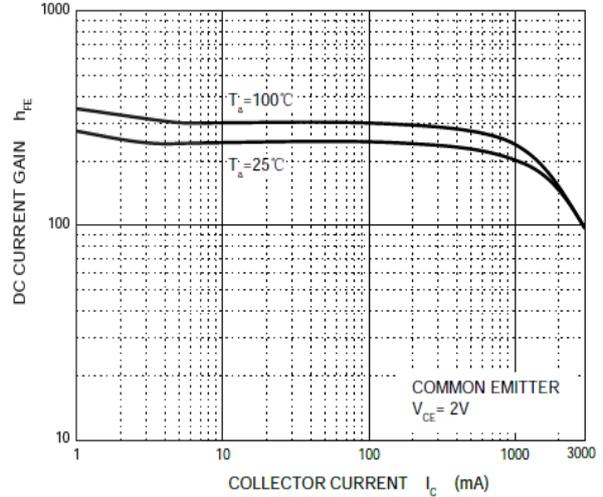


Fig 3. $V_{CEsat} - I_c$

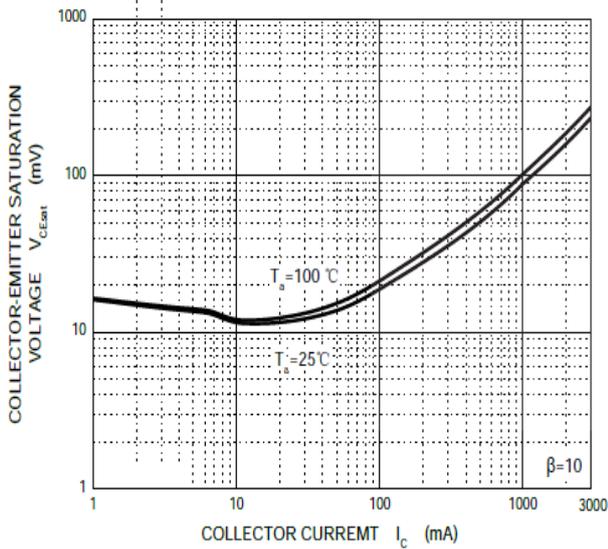


Fig 4. $V_{BEsat} - I_c$

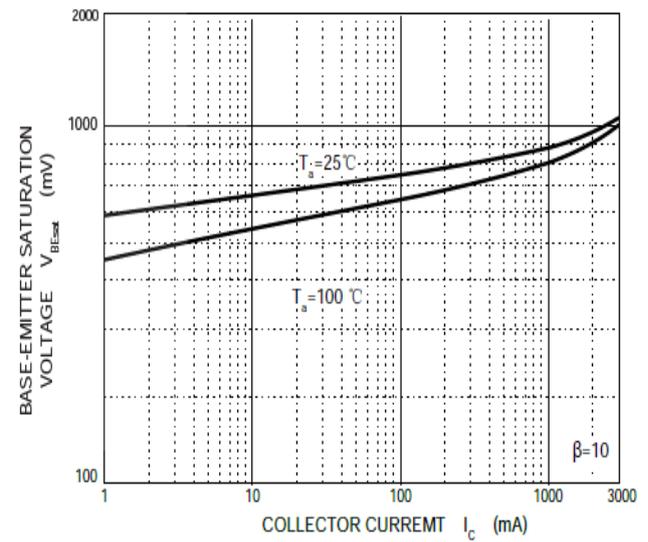




Fig 5. $I_c - V_{BE}$

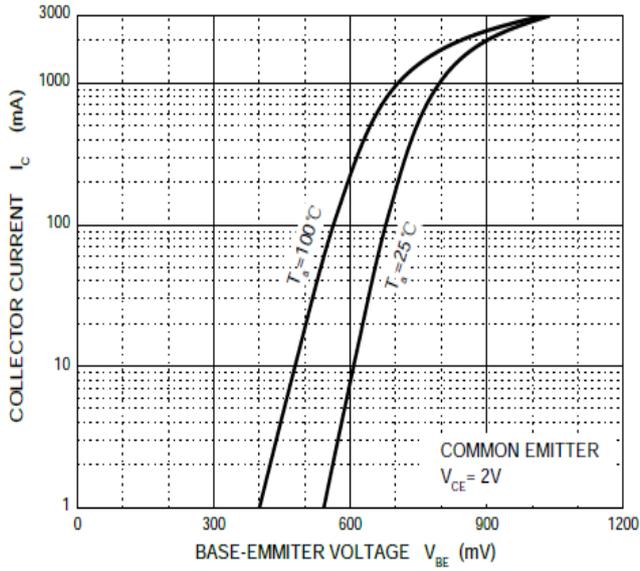


Fig 6. $C_{ob}/C_{ib} - V_{CB}/V_{EB}$


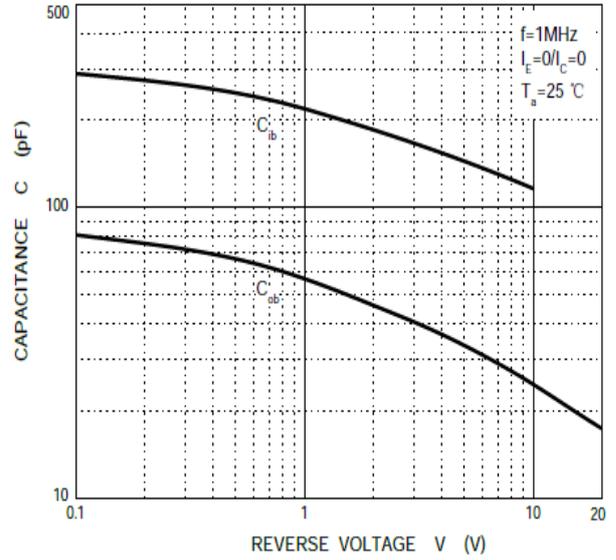



Fig 7. $P_c - T_a$



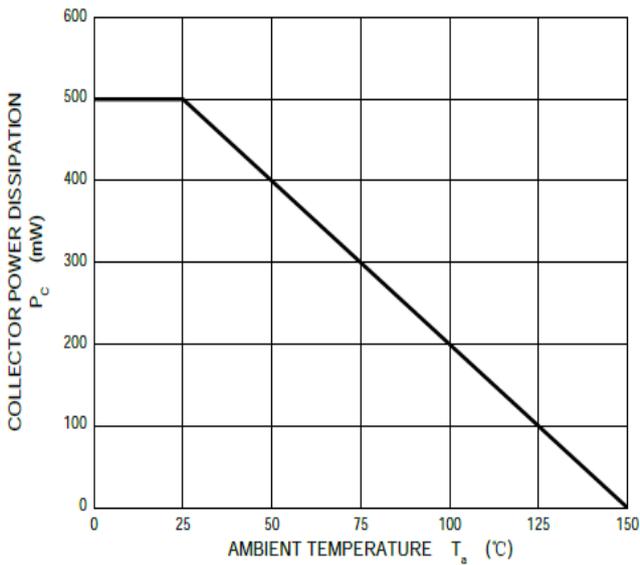

PACKAGE INFORMATION

Dimension in SOT-223 Package (Unit: mm)

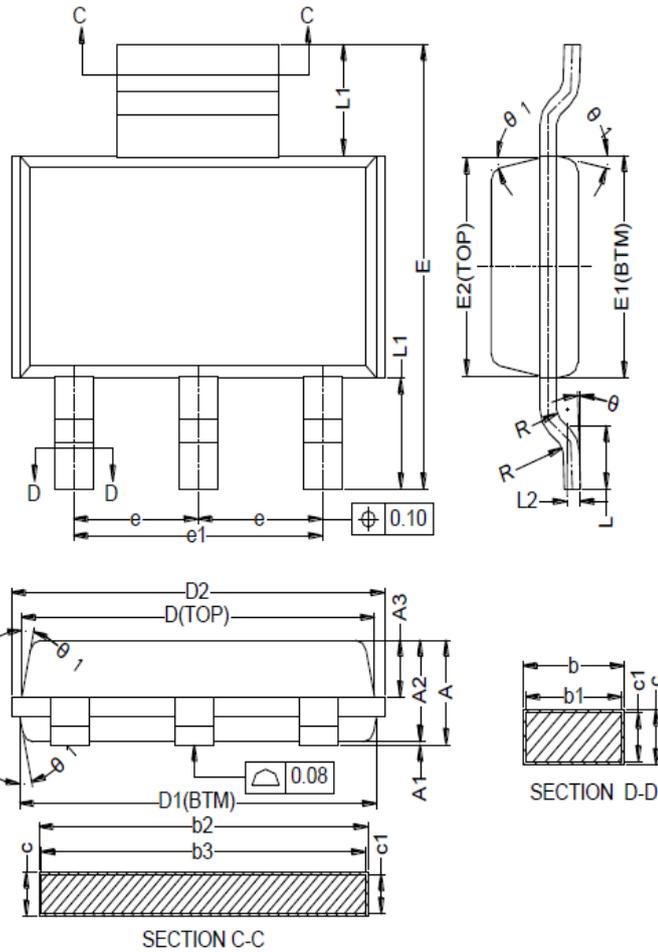

Symbol	Min	Max	Symbol	Min	Max
A	-	1.80	E	6.80	7.20
A1	0.02	0.10	E1	3.40	3.60
A2	1.50	1.70	E2	3.33	3.53
A3	0.80	1.00	e	2.30BSC	
b	0.67	0.80	e1	4.60BSC	
b1	0.66	0.76	L	0.80	1.20
b2	2.96	3.09	L1	1.75REF	
b3	2.95	3.05	L2	0.25BSC	
c	0.30	0.35	R	0.10	-
c1	0.29	0.31	R1	0.10	-
D	6.48	6.58	θ	0°	8°
D1	6.55	6.65	θ_1	10°	14°
D2	-	7.05			



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc. integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or server property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.