



DESCRIPTION

The A7131 is a monolithic step-down DC/DC converter capable of delivering up to 3A of output current without requiring an external transistor, saving board space. The device features a low EMI signature and can operate at 100% duty cycle for low-dropout operation.

The internal soft-start function limits inrush current, helping to extend battery life in portable systems. Protection features include cycle-by-cycle peak current limiting, short-circuit protection, thermal shutdown, and UVLO.

The device is available in SOT-26 package.

ORDERING INFORMATION

Package Type	Part Number	
SOT-26 SPQ:3,000pcs/Reel	E6	A7131E6R
		A7131E6VR
Note	V: Halogen free Package R: Tape & Reel	
AiT provides all RoHS products		


FEATURES

- Wide input voltage Range: 2.5V~5.5V
- Adjustable Output Voltage from 0.6V to V_{IN}
- Low $R_{DS(ON)}$ Switches 80m Ω / 55m Ω
- Output Discharge Resistance: 20 Ω
- 1MHz Typical Switching Frequency
- Duty Cycle up to 100%
- Short Circuit Protection
- Over Current Protection
- Internal Soft Startup
- Thermal Shutdown Protection


APPLICATION

- LCD Monitor and LCD TV
- Battery-powered Equipment
- Entertainment Devices
- Digital Home Appliances: Digital TVs

TYPICAL APPLICATION

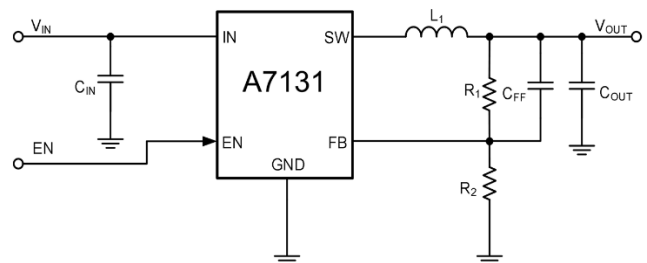

L1: PIA4030-1R0N or PIA5040-1R5N

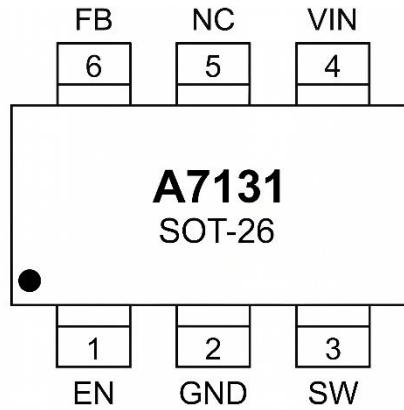**PIN DESCRIPTION**

SOT-26, E6

Top View

PIN#	Symbol	Function
1	EN	Enable input. Logic high enables the device, while logic low disables the device and places it in shutdown mode. Do not leave this pin floating.
2	GND	Ground pin.
3	SW	Switch pin connected to the internal FET switches. Connect the output filter inductor to this pin.
4	VIN	Power supply voltage input.
5	NC	Not Connected
6	FB	Feedback input. Connect this pin to an external feedback voltage divider for the internal control loop.



ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range, unless otherwise noted

V _{IN} , and EN Voltage	-0.3V ~ 6V
SW, Voltage	-0.3V ~ V _{IN} +0.3V
FB, Voltage	- 0.3V ~ 6V
T _J , Operating Junction Temperature	-40°C ~ +150°C
T _{STG} , Storage Temperature	-65°C ~ +150°C
R _{θJA} , Junction-to-Ambient Thermal Resistance	240°C/W
R _{θJC} (top), Junction-to-Case (Top) Thermal Resistance	140°C/W


Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

RECOMMENDED OPERATING CONFITIONS

T_C= 25°C, unless otherwise specified.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Operating Junction Temperature	-	-	-40	-	125	°C
Operating temperature range	-	-	-40	-	85	°C
Input Voltage	V _{IN}	-	2.5	-	5.5	V
Output Current	-	-	0	-	3.0	A

EFFICIENCY

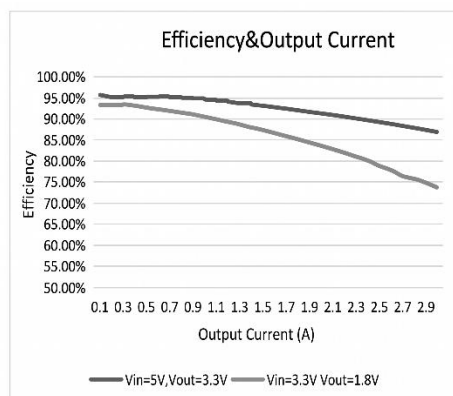


**ELECTRICAL CHARACTERISTICS**T_A = 25°C, V_{IN} = 5V, unless otherwise specified.

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Input voltage range	V _{IN}	-	2.5	-	5.5	V
Non switching quiescent current	I _Q	OUT=1.8V, I _{load} =0A	-	40	75	μA
Shutdown current	I _{OFF}	EN = GND	-	-	1	μA
Regulated Feedback Voltage	V _{FB}	-	588	600	612	mV
V _{IN} under voltage lockout	V _{IN(UVLO)}	-	-	2.2	-	V
V _{IN} under voltage lockout Hysteresis		-	-	300	-	mV
ENABLE (EN PIN)						
Enable threshold	V _(EN_RISING)	Rising	1.2	-	-	V
	V _(EN_FALLING)	Falling	-	-	0.4	V
Threshold Hysteresis	V _(EN_HYS)	-	-	270	-	mV
POWER STAGE						
High-side FET on resistance	R _(HSD)	I _{sw} =100mA	-	80	-	mΩ
Low-side FET on resistance	R _(LSD)	I _{sw} =-100mA	-	55	-	mΩ
Output Discharge Resistance	-	-	-	20	-	Ω
CURRENT LIMIT						
High-side FET current limit	I _(LIM_HS)	FB=90%	-	4	-	A
Low side FET current limit	I _(LIM_LS)	FB=90%	-	3	-	A
OSCILLATOR						
Centre switching frequency	F _{SW}	OUT=1.8V, I _{load} =1A	-	1.0	-	MHz
OVER TEMPERATURE PROTECTION						
Rising temperature	Thermal	-	-	160	-	°C
Hysteresis	Shutdown	-	-	30	-	°C
Soft start	-	-	0.5	1	1.5	ms



BLOCK DIAGRAM

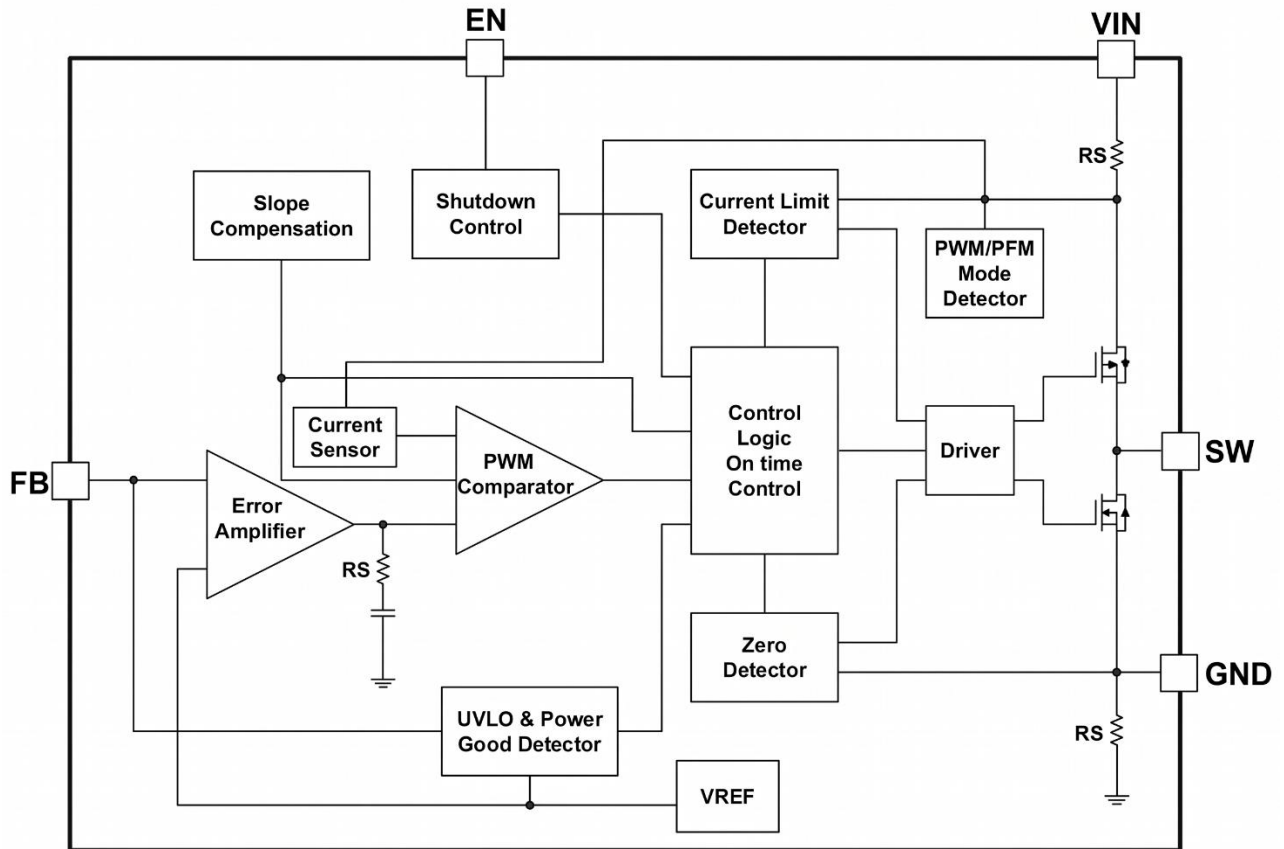



DETAILED INFORMATION

Overview


The A7131 is a high-output-current, monolithic step-down DC/DC converter designed to deliver up to 3A of output current from an input voltage ranging from 2.5V to 5.5V. The device operates at a fixed 1MHz switching frequency and utilizes a slope-compensated current-mode control architecture.

The external shutdown function can be controlled by a logic-level signal to place the device into standby mode. Internal compensation simplifies the design and provides good line and load regulation without requiring external compensation components. For protection, the A7131 incorporates thermal shutdown to prevent damage caused by excessive operating temperature and cycle-by-cycle current limiting to protect the internal power switch from overcurrent conditions. When the current-limit condition occurs and V_{FB} falls below 0.6V, the switching frequency is reduced to provide additional protection under severe load conditions.

Application information

The A7131 is a high-performance, monolithic step-down converter with a wide 2.5V to 5.5V input voltage range and up to 3A output current. The device operates at a fixed 1MHz switching frequency and requires only a few external power components, including C_{IN} , C_{OUT} , and L_1 . The output voltage can be programmed using an external feedback network to any voltage from 0.6V up to the input voltage.

$$V_{OUT} = 0.6 \times \frac{R_1 + R_2}{R_2}$$

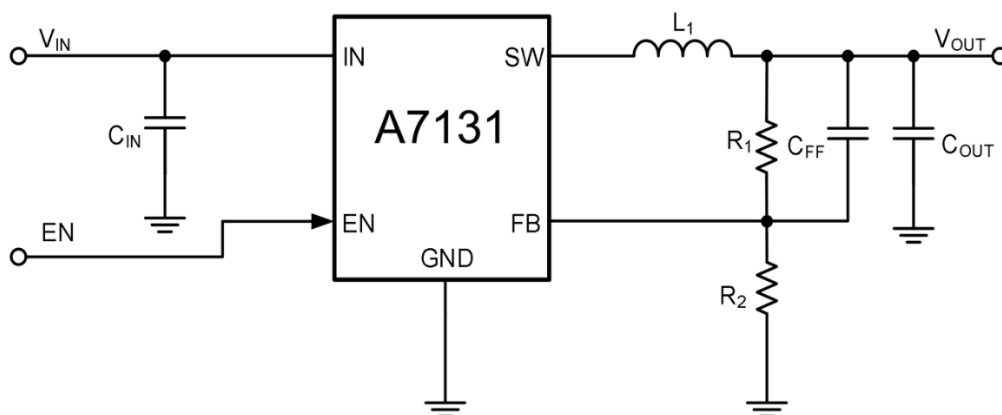

**Table 1. Recommended Component Values**

V _{OUT} (V)	L1 (μH)	C _{IN} (μF)	C _{OUT} (μF)	C _{FF} Opt.(pF)	R1 (kΩ)	R2 (kΩ)
1	1-2.2	10	22	10~100	6.67	10
1.5	1-2.2	10	22	10~100	15	10
1.8	1-2.2	10	22	10~100	20	10
3.3	1-2.2	10	22	10~100	45	10

Table 2 . Reference inductor model

Input Voltage (V)	Output Voltage	Output Current	Inductance	Inductor model
5	1	3	0.899	PIA4030-1R0N (1μH)
5	1.5	3	1.167	PIA5040-1R5N (1.5μH)
5	1.8	3	1.280	PIA5040-1R5N (1.5μH)
5	3.3	3	1.247	PIA5040-1R5N (1.5μH)

Note: The inductor values provided are for reference only. The required inductance should be recalculated based on the actual application conditions, including input voltage, output voltage, load current, switching frequency, and other relevant parameters.

Power Supply Recommendations

The devices are designed to operate from an input voltage supply range between 2.5V and 5.5V. This input supply must be well regulated. If the input supply is located more than a few inches from the device or converter, additional bulk capacitance may be required in addition to the ceramic bypass capacitors. An electrolytic capacitor with a value of 47 μF is a typical choice.


Layout Guidelines

- V_{IN} and GND traces should be as wide as possible to reduce trace impedance. The wide areas are also of advantage from the viewpoint of heat dissipation.
- The input capacitor and output capacitor should be placed as close to the device as possible to minimize trace impedance.
- Provide sufficient vias for the input capacitor and output capacitor.
- Keep the SW trace as physically short and wide as practical to minimize radiated emissions.
- Do not allow switching current to flow under the device.
- A separate V_{OUT} path should be connected to the upper feedback resistor.
- Make a Kelvin connection to the GND pin for the feedback path.
- Voltage feedback loop should be placed away from the high-voltage switching trace, and preferably has ground shield.
- The trace of the V_{FB} node should be as small as possible to avoid noise coupling.
- The GND trace between the output capacitor and the GND pin should be as wide as possible to minimize its trace impedance.



PACKAGE INFORMATION

Dimension in SOT-26 (Unit: mm):

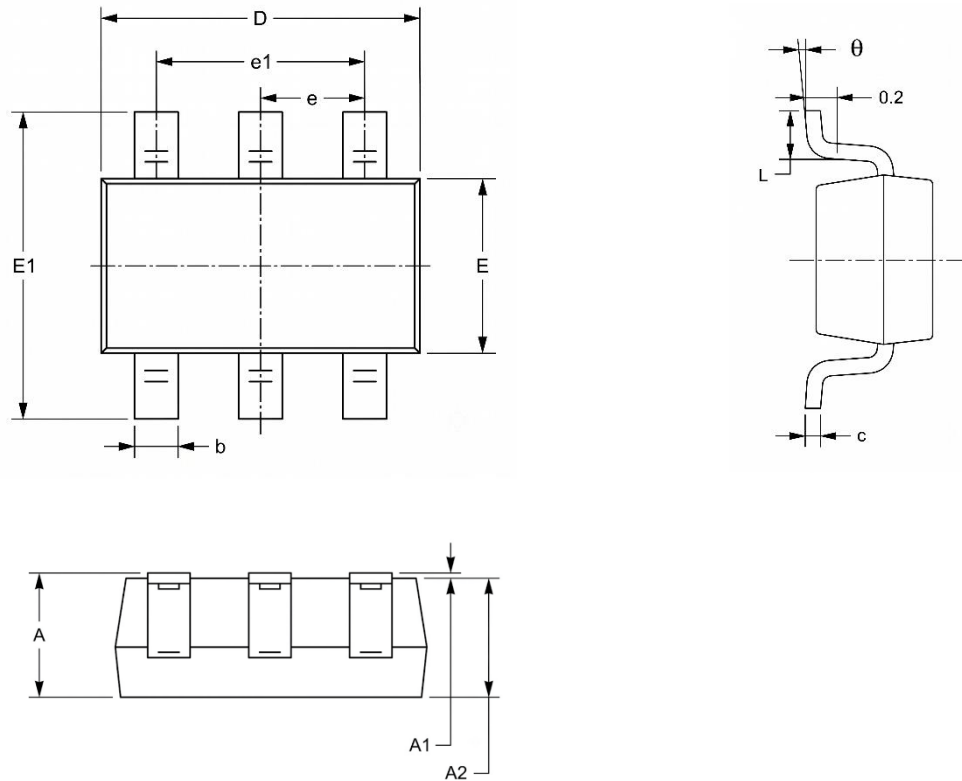

Symbol	MILLIMETERS	
	Min.	Max.
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.300	0.500
c	0.100	0.200
D	2.820	3.020
E	1.500	1.700
E1	2.650	2.950
e	0.950 BSC	
e1	1.900 BSC	
L	0.300	0.600
θ	0°	8°

**IMPORTANT NOTICE**

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc. integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or server property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.